





Model: BFC6-7
BFC6-8
(Scale pallet truck with printer)



Premium



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

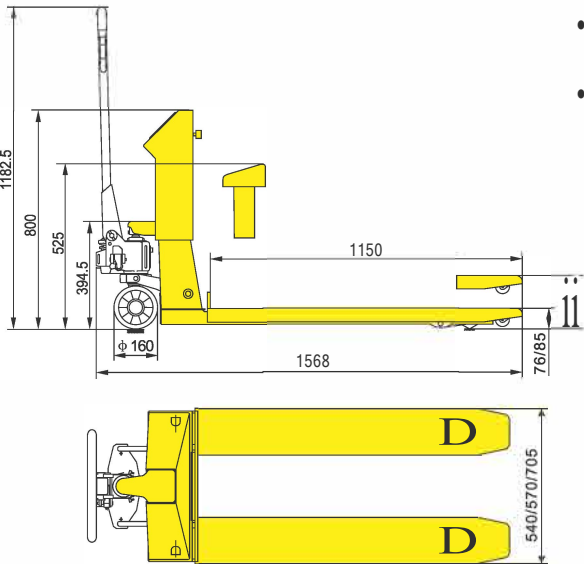

- Mobile pallet truck with scale combined two major functions for pallet truck/scale, allows you to weigh cargo whatever, wherever, whenever you want.
- Power supply with rechargeable battery or with 86-264V AC input.
- Keypad and automatic tare functions.
- 1.2inches, super-large and bright LED display in solid state to be strike-free.
- Available in pounds or kilograms.
- ND velocity: 27/s, a faster speed of weighing, more correct.
- Various functions: with extended functions as weight-checking ,counting, etc., to satisfy different needs of customers.
- Conforms to EU's ROHS standard.

1KG=2.205LB 1INCH=25.40MM

Model	BFC6/BFC6-II	BFC6-7/BFC6-8
Capacity	(kg) 2000	2000
Lowered fork height	(mm) 76/85	76/85
Total lift height	(mm) 165/175	165/175
Fork length	(mm) 1150	1150
Width overall forks	(mm) 540/570/705	540/570/705
Steering wheel	(mm) ϕ 160	ϕ 160
Fork wheel	(mm) ϕ 70	ϕ 70
Power	Dry cell/ N MH rechargeable battery	Lead-acid battery
Max deviation (weight)	(kg) 0.5	0.5
Max. deviation (rate)	(%) \pm 0.1%	\pm 0.1%
Service weight	(kg) 133-142	133-142


Model: BFC6-7M

Advantages:

- The display appearance with simple design, concise and clear.
- 60mm super large 5- digit LCD display screen , word height 20mm.
- Digital filtering is used to compensate for vibration and improve the scale accuracy, Maximum error 0.05%, weighing accuracy 0.5kg, max to 0.2kg.
- 4 function button, very easy and convenience to operation.
- Powered by 3 units AA battery, easy change, durable and long lasting, Battery life 600 hours in standby mode.



Standard

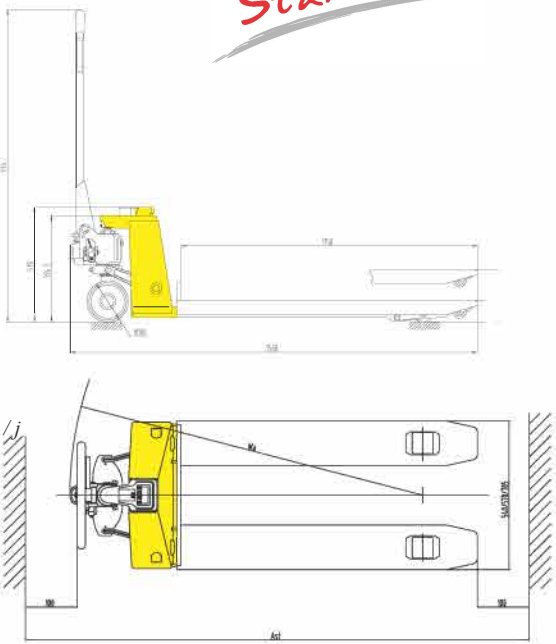

- Display have backlight, will light up automatically when weight have changes, very convenience for operator reading. Also the backlight will turn off while the weight stable, save power.
- The back of the instrument adopts totally enclosed design, glue all the outside line, which improve instrument protection grade.
- The front of display with U protective shield, prevent instrument damaged during operation.

1KG=2.205LB 1INCH=25.40MM

Model	BFC6-7M
Capacity	kg 2000
Lowest fork height	mm 76/85
Max Lifting Height	mm 165/175
Fork length	mm 1150
Width overall forks	mm 540/570/705
Steering wheel	mm ϕ 160
Fork wheel	mm ϕ 70
Battery	dry battery
Max deviation (weight)	kg 0.5
Max deviation (rate)	% \pm 0.05%
Turning Radius	mm 1368
Service weight	kg 118-130