



GREENTRAC

Running the Road Together



~ ENGINEERED IN GERMANY ~

2020/2021 VERSION 1.0

ABOUT GREENTRAC

As a premium brand, Greentrac is a milestone in Keter portfolio. The unique patterns, ultra-excellent wet-grip and outstanding speed level all make Greentrac really special and different. In this way Greentrac becomes a true Chinese premium brand which greatly makes up the market gap.



GREENTRAC team visit customers annually to tap into the markets. When in one R&D trip in Germany, we found that the market is keen on the excellent wet grip and high speed rating which stands for the worldwide expectation of premium tyres. However, most Chinese brands fail to meet the demands well. Then comes Greentrac—A brilliant brand engineered in Germany!

Super wet grip **A-LEVEL**,
no fear of skid.



High speed GREENTRAC reach
270km/h, 300km/h.



The rim protector is **20% HIGHER**
than others to better protect rim.



GREENTRAC,
— born to win, will show you something really different!


JOURNEY-X

~ ENGINEERED IN GERMANY ~

Performance Tour



ROLLING RESISTANCE




WET GRIP PERFORMANCE




QUIETNESS



COMFORT



TREAD LIFE



ASYMMETRIC PATTERN DESIGN

Bionic asymmetric pattern design brings grip and controls




BLOCK PATTERN DESIGN

Strong block pattern design improves wear resistance meanwhile it ensures the stability of the car control and driving safety.



LONG TREAD LIFE

Special formulated compound with enhanced shoulder construction ensures even wear and long last tread life.

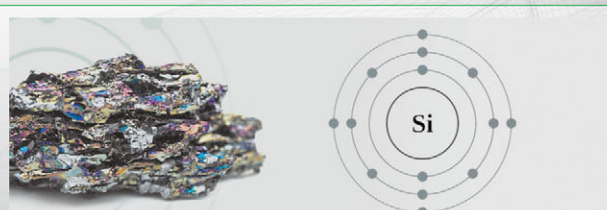

FORMULATIONS CONTAINING SILICON

Silicon-based formula offers excellent fuel-efficient ability while providing excellent wet performance

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D		EU LABELING			
				(mm/32nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
13	155/65R13	73 T	4.50B	6.7 / 8.4	E	C	70	((	
13	155/70R13	79/XL T	4.50B	6.7 / 8.4	E	C	70	((	
13	155/80R13	79 T	4.50B	6.7 / 8.4	E	C	70	((	
13	165/65R13	77 H	5.00B	6.7 / 8.4	C	C	70	((	
13	165/70R13	79 H	5.00B	6.7 / 8.4	C	C	70	((	
13	175/60R13	77 H	5J	6.7 / 8.4	E	C	70	((	
13	175/70R13	82 H	5.00B	6.7 / 8.4	C	C	70	((	
13	185/70R13	86 H	5.50B	6.7 / 8.4	C	C	70	((	
14	155/65R14	75 T	4.5J	6.7 / 8.4	E	C	70	((	
14	165/60R14	75 H	5J	6.7 / 8.4	C	C	70	((	
14	165/65R14	79 H	5.00B	6.7 / 8.4	C	C	70	((	
14	165/70R14	81 H	5J	6.7 / 8.4	C	C	70	((	
14	175/65R14	86/XL H	5J	6.7 / 8.4	C	C	70	((	
14	175/70R14	88/XL H	5.5J	6.7 / 8.4	C	C	70	((	
14	185/55R14	80 H	6J	6.7 / 8.4	E	C	70	((	
14	185/60R14	82 H	5.5J	6.7 / 8.4	C	C	70	((	
14	185/65R14	86 H	5.5J	6.7 / 8.4	C	C	70	((	
14	185/70R14	88 H	5.5J	6.7 / 8.4	C	C	70	((	
14	195/60R14	86 H	6J	6.9 / 8.7	C	C	71	((	
14	195/70R14	91 H	6J	6.9 / 8.7	C	C	71	((	
14	205/70R14	98/XL H	6J	6.7 / 8.4	C	C	71	((	
15	165/65R15	81 H	5J	6.7 / 8.4	C	C	70	((	
15	175/60R15	81 H	5J	6.7 / 8.4	C	C	70	((	
15	175/65R15	88/XL H	5J	6.7 / 8.4	C	C	70	((	
15	185/55R15	86/XL V	6J	6.9 / 8.7	C	C	70	((	
15	185/60R15	88/XL H	5.5J	6.9 / 8.7	C	C	70	((	
15	185/65R15	92/XL H	5.5J	6.9 / 8.7	C	C	70	((	
15	195/50R15	82 V	6J	6.9 / 8.7	C	C	71	((	
15	195/55R15	85 V	6J	6.9 / 8.7	C	C	71	((	
15	195/60R15	88 V	6J	6.9 / 8.7	C	C	71	((	

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D		EU LABELING			
				(mm/32nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
15	195/65R15	91 V	6J	6.9 / 8.7	C	C	71	((	
15	205/60R15	91 V	6J	6.9 / 8.7	C	C	71	((	
15	205/65R15	94 H	6J	6.9 / 8.7	C	C	71	((	
15	205/70R15	96 H	6J	6.9 / 8.7	C	C	71	((	
15	215/65R15	100/XL V	6.5J	6.9 / 8.7	C	C	71	((	
15	215/70R15	98 H	6.5J	6.9 / 8.7	C	C	71	((	
16	185/50R16	81 V	6J	6.7 / 8.4	E	C	70	((	
16	185/55R16	83 V	6J	6.9 / 8.7	C	C	70	((	
16	195/45R16	84/XL V	6.5J	6.9 / 8.7	C	C	71	((	
16	195/50R16	88/XL V	6J	6.9 / 8.7	C	C	71	((	
16	195/55ZR16	91/XL W	6J	6.9 / 8.7	C	C	71	((	
16	195/60R16	89 H	6J	6.9 / 8.7	C	C	71	((	
16	205/50ZR16	87 W	6.5J	6.9 / 8.7	C	C	71	((	
16	205/55ZR16	91 W	6.5J	6.9 / 8.7	C	C	71	((	
16	205/60R16	92 V	6J	6.9 / 8.7	C	C	71	((	
16	205/65R16	95 V	6J	6.9 / 8.7	C	C	71	((	
16	215/55ZR16	97/XL W	7J	6.9 / 8.7	C	C	71	((	
16	215/60R16	99/XL V	6.5J	6.9 / 8.7	C	C	71	((	
16	215/65R16	98 H	6.5J	6.9 / 8.7	C	C	71	((	
16	225/55ZR16	99/XL W	7J	6.9 / 8.7	C	C	71	((	
16	225/60R16	98 H	6.5J	6.9 / 8.7	C	C	71	((	
17	205/40ZR17	84/XL W	7.5J	6.9 / 8.7	C	C	71	((	
17	205/45ZR17	88/XL W	7J	6.9 / 8.7	C	C	71	((	
17	215/40ZR17	87/XL W	7.5J	6.9 / 8.7	E	C	71	((	
17	215/45ZR17	91/XL W	7J	6.9 / 8.7	C	C	71	((	
17	215/50ZR17	95/XL W	7J	6.9 / 8.7	C	C	71	((	
17	225/45ZR17	94/XL W	7.5J	6.9 / 8.7	C	C	71	((	
17	235/45ZR17	97/XL W	8J	6.9 / 8.7	C	C	71	((	
18	235/40ZR18	97/XL W	8.5J	6.9 / 8.7	C	C	71	((	


QUEST-X

~ ENGINEERED IN GERMANY ~


UHP




ROLLING RESISTANCE




WET GRIP PERFORMANCE




QUIETNESS



COMFORT




TREAD LIFE

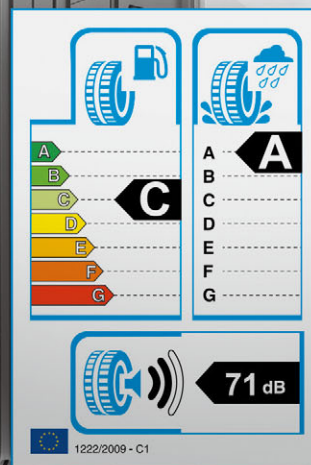


EXCELLENT WET GRIP-A LEVEL!

The large-groove design ensures excellent wet grip performance and more fuel saving.

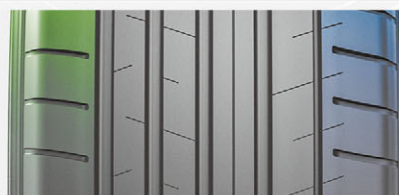


ASYMMETRICAL PATTERN DESIGN

This design of outside longitudinal groove improves a lot the performance of wet grip and controllability.

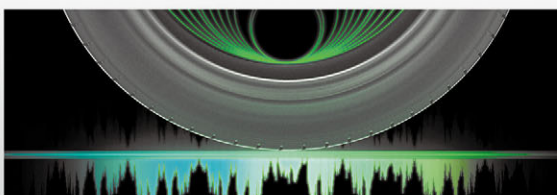

LOW NOISE

5-pitch & multi-steel disc pattern design reduces the noise.

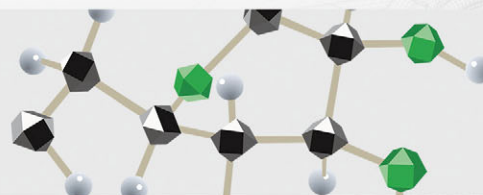

ORIGINAL FORMULA

New formula with melt polymerized styrene butadiene and silicon offers excellent wet grip and low rolling resistance.

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D			EU LABELING		
				(mm/2nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
17	205/50ZR17	93/XL Y	6.5J	7.4 / 9.3	C	A	70	((	
17	215/55ZR17	94 W	7J	7.6 / 9.6	C	A	70	((	
17	225/50ZR17	98/XL Y	7J	7.6 / 9.6	C	A	70	((	
17	225/55ZR17	97 W	7J	7.6 / 9.6	C	A	70	((	
17	245/45ZR17*	99/XL Y	8J	7.4 / 9.3	C	A	70	((	
18	215/50ZR18	96XL Y	7J	7.2 / 9.1	C	A	70	((	
18	215/55ZR18	99/XL W	7J	7.6 / 9.6	C	A	70	((	
18	225/40ZR18	92/XL Y	8J	7.4 / 9.3	C	A	70	((	
18	225/45ZR18	95/XL Y	7.5J	7.6 / 9.6	C	A	70	((	
18	225/55ZR18	98 W	7J	7.6 / 9.6	C	A	70	((	
18	235/45ZR18	98/XL Y	8J	7.4 / 9.3	C	A	70	((	
18	235/50ZR18	101/XL Y	7.5J	7.6 / 9.6	C	A	70	((	
18	235/55ZR18	104/XL W	7.5J	7.6 / 9.6	C	A	70	((	
18	245/40ZR18	97/XL Y	8.5J	7.4 / 9.3	C	A	70	((	
18	245/45ZR18	100/XL Y	8J	7.4 / 9.3	C	A	70	((	
18	245/50ZR18	104/XL Y	7.5J	7.6 / 9.6	C	A	70	((	
18	255/35ZR18*	94 Y	8J	7.2 / 9.1	C	A	71	((	
18	255/45ZR18	103/XL Y	8J	7.4 / 9.3	C	A	71	((	
18	265/35ZR18*	97/XL Y	9J	7.2 / 9.1	C	A	71	((	
18	275/40ZR18	103XL Y	10J	7.2 / 9.1	C	A	71	((	
18	285/35ZR18	101/XL Y	10J	7.2 / 9.1	C	A	73	((	
19	225/35ZR19	88/XL Y	8J	7.4 / 9.3	C	A	70	((	
19	225/40ZR19	93/XL Y	8J	7.4 / 9.3	C	A	70	((	
19	225/45ZR19	96/XL Y	7.5J	7.4 / 9.3	C	A	70	((	
19	235/35ZR19	91/XL Y	8.5J	7.2 / 9.1	C	A	70	((	
19	235/40ZR19	96/XL Y	8.5J	7.4 / 9.3	C	A	70	((	
19	235/50ZR19	103/XL Y	7.5J	7.6 / 9.6	C	A	70	((	
19	235/55ZR19	105/XL W	7.5J	7.6 / 9.6	C	A	70	((	
19	245/35ZR19	93/XL Y	8.5J	7.2 / 9.1	C	A	70	((	
19	245/40ZR19	98/XL Y	8.5J	7.4 / 9.3	C	A	70	((	
19	245/45ZR19	102/XL Y	8J	7.4 / 9.3	C	A	70	((	
19	245/55ZR19	103 W	7.5J	7.6 / 9.6	C	A	70	((	
19	255/30ZR19*	91 Y	9J	7.2 / 9.1	C	A	71	((	
19	255/35ZR19	96/XL Y	8J	7.2 / 9.1	C	A	71	((	
19	255/40ZR19	100/XL Y	9J	7.4 / 9.3	C	A	71	((	
19	255/45ZR19	104/XL Y	10J	7.4 / 9.3	C	A	71	((	
19	255/50ZR19	107/XL Y	8J	7.6 / 9.6	C	A	71	((	
19	255/55ZR19	111/XL W	8J	7.6 / 9.6	C	A	71	((	
19	265/30ZR19	93/XL Y	9.5J	7.2 / 9.1	C	A	71	((	
19	265/35ZR19	98/XL Y	9.5J	7.2 / 9.1	C	A	71	((	
19	265/40ZR19	102XL Y	9.5J	7.2 / 9.1	C	A	71	((	
19	265/50ZR19*	110/XL Y	8.5J	7.6 / 9.6	C	A	71	((	
19	275/30ZR19	96/XL Y	9.5J	7.2 / 9.1	C	A	71	((	
19	275/35ZR19	100/XL Y	9.5J	7.2 / 9.1	C	A	71	((	
19	275/40ZR19	105/XL Y	9.5J	7.4 / 9.3	C	A	71	((	
19	275/55ZR19	111 W	8.5J	7.6 / 9.6	C	A	71	((	

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D			EU LABELING		
				(mm/2nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
19	285/45ZR19*	111XL Y	9.5J	7.4 / 9.3	C	A	73	((	
19	295/30ZR19	100/XL Y	10.5J	7.2 / 9.1	C	A	73	((	
20	225/35ZR20	90/XL Y	8J	7.2 / 9.1	C	A	70	((	
20	235/45ZR20*	100/XL Y	8J	7.4 / 9.3	C	A	70	((	
20	235/55ZR20	105/XL W	7.5J	7.6 / 9.6	C	A	70	((	
20	245/35ZR20*	95/XL Y	8.5J	7.2 / 9.1	C	A	70	((	
20	245/40ZR20*	99 Y	8.5J	7.2 / 9.1	C	A	70	((	
20	245/45ZR20	99 Y	8J	7.4 / 9.3	C	A	71	((	
20	245/50ZR20	102 Y	9J	7.6 / 9.6	C	A	71	((	
20	255/40ZR20	101/XL Y	10J	7.4 / 9.3	C	A	71	((	
20	255/45ZR20*	105/XL Y	8.5J	7.4 / 9.3	C	A	71	((	
20	255/50ZR20	109/XL Y	8J	7.6 / 9.6	C	A	71	((	
20	255/55ZR20	110/XL W	8J	7.6 / 9.6	C	A	71	((	
20	265/40ZR20	104/XL Y	9.5J	7.4 / 9.3	C	A	71	((	
20	265/45ZR20	108/XL Y	9J	7.4 / 9.3	C	A	71	((	
20	275/30ZR20*	97/XL Y	9.5J	7.2 / 9.1	C	A	71	((	
20	275/35ZR20*	102/XL Y	9.5J	7.2 / 9.1	C	A	71	((	
20	275/40ZR20	106/XL Y	9.5J	7.4 / 9.3	C	A	71	((	
20	275/45ZR20	110/XL Y	9J	7.6 / 9.6	C	A	71	((	
20	275/50ZR20	113/XL Y	8.5J	7.6 / 9.6	C	A	71	((	
20	285/40ZR20*	108 Y	10J	7.2 / 9.1	C	C	73	((	
20	285/45ZR20	112/XL Y	8J	7.4 / 9.3	C	A	73	((	
20	285/50ZR20	116/XL W	9J	7.6 / 9.6	C	A	73	((	
20	295/35ZR20	105/XL Y	10J	7.2 / 9.1	C	A	73	((	
20	295/40ZR20	110XL Y	10.5J	7.2 / 9.1	C	A	73	((	
20	315/35ZR20	110/XL Y	11J	7.2 / 9.1	C	A	73	((	
21	265/40ZR21	105/XL Y	9.5J	7.4 / 9.3	C	A	71	((	
21	265/45ZR21	108/XL Y	9J	7.4 / 9.3	C	A	71	((	
21	275/35ZR21*	103/XL Y	9.5J	7.2 / 9.1	C	A	71	((	
21	275/45ZR21	110/XL Y	9J	7.6 / 9.6	C	A	71	((	
21	285/35ZR21	105/XL Y	10J	7.2 / 9.1	C	A	73	((	
21	285/40ZR21*	109XL Y	10J	7.2 / 9.1	C	A	73	((	
21	295/35ZR21	107XL Y	10.5J	7.2 / 9.1	C	A	73	((	
21	295/40ZR21	111/XL Y	10.5J	7.4 / 9.3	C	A	73	((	
21	315/35ZR21*	111XL Y	11J	7.2 / 9.1	C	A	73	((	
21	315/40ZR21	115XL Y	11J	7.2 / 9.1	C	A	73	((	
21	325/30ZR21	108/XL Y	11.5J	7.2 / 9.1	C	A	73	((	
22	265/40ZR22	106/XL Y	9.5J	7.4 / 9.3	C	A	71	((	
22	275/40ZR22	107/XL Y	9.5J	7.4 / 9.3	C	A	71	((	
22	285/45ZR22	114/XL Y	9.5J	7.4 / 9.3	C	A	73	((	

*NEW

PRODRA-G-S

~ ENGINEERED IN GERMANY ~

UHP



◆ ASYMMETRIC PATTERN DESIGN

The lateral big block pattern design can maximize tire contact area, to ensure super good handling performance at high speed

◆ THE OVERLAP PATTERN DESIGN

The overlap pattern design can make excellent ground grip performance, thus ensuring excellent brake performance either on wet or dry road

◆ THE 3D CAMBER TREAD DESIGN

The 3D camber tread design in the central part can greatly improve tyre's handling performance during turning

◆ THE ASYMMETRICAL AND DIFFERENT PITCH PATTERN DESIGN

The asymmetrical and different pitch pattern design in both sides can minimize the noise during running to make more comfortability.



SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D (mm/32nds)	EU LABELING			
				ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL
15	195/55R15	85 V	6J	7.6 / 9.6	E	A	71 ((
18	245/45ZR18	100/XL W	8J	7.6 / 9.6	E	A	71 ((
18	255/45ZR18	103/XL W	8.5J	7.6 / 9.6	E	A	72 ((
18	255/50R18	106/XL V	8J	7.6 / 9.6	E	A	72 ((
18	255/55R18	109/XL V	8J	7.6 / 9.6	E	A	72 ((
18	265/60R18	110 H	8J	7.8 / 9.8	E	A	72 ((
18	275/40ZR18	103/XL W	9.5J	7.6 / 9.6	E	A	72 ((
20	265/50R20	111/XL V	8.5J	7.8 / 9.8	E	A	72 ((

UTQG:400 AA

SUPERANGE-X

~ ENGINEERED IN GERMANY ~

TAXI



- ◆ The use of imported ultra-fine carbon black can greatly improve the wearability of tires, ensure the ultra-long mileage
- ◆ Slight asymmetrical pattern and central reinforcement design effectively can reduce tire noise and improve ride comfort
- ◆ The closed groove on the shoulder and strong pattern block design can ensure the shoulder wear resistance while improving turn grip



	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D (mm/32nds)	EU LABELING			
					ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL
16	205/65R16	99/XL V	6J	7.6 / 9.6	C	B	72	((
17	215/55ZR17	98/XL W	7J	7.6 / 9.6	E	B	72	((
17	225/55ZR17	101/XL W	7J	7.6 / 9.6	E	B	72	((

UTQG:600 AA


SEASON MASTER

~ ENGINEERED IN GERMANY ~


FOUR SEASON




ROLLING RESISTANCE




WET GRIP PERFORMANCE



QUIETNESS



COMFORT




TREAD LIFE



MULTI-PITCH TREAD DESIGN

Large groove design ensures excellent performance in wet grip and fuel saving.

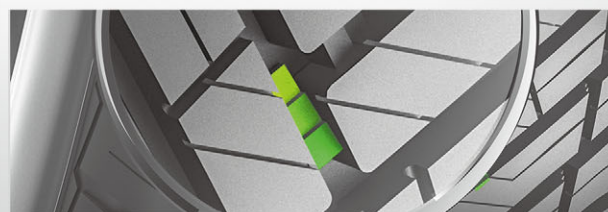

CENTER WEDGE PATTERN & 3D STEEL SHEET DESIGN

It can effectively prevent tyres from skidding on wet ground and improve braking and handling performance.



DIRECTIONAL PATTERN DESIGN

This design ensures excellent tyre grip and extra strong snow traction performance under any weather conditions.



NEW FORMULA

New 4S formula provides not only excellent wet grip performance but also lower rolling resistance.

SEASON MASTER

SIZES & SPECIFICATION

UTQG:420 AA

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D		EU LABELING			
				(mm/32nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
14	155/65R14	75 H	4.5 J	7.6 / 9.6	E	B	70	((	
14	165/60R14*	79 H	5J	7.6 / 9.6	E	B	70	((	
14	165/65R14*	79 H	5J	7.6 / 9.6	E	B	70	((	
14	165/70R14*	81 T	5J	7.6 / 9.6	E	B	70	((	
14	175/65R14	82 H	5 J	7.6 / 9.6	E	B	70	((	
14	185/55R14*	80 H	6J	7.6 / 9.6	E	B	70	((	
14	185/60R14*	82 H	5.5J	7.6 / 9.6	E	B	70	((	
14	185/65R14*	86 H	5.5J	7.6 / 9.6	E	B	70	((	
15	175/65R15*	88 H	5J	7.6 / 9.6	E	B	70	((	
15	185/55R15	82 V	6 J	7.6 / 9.6	E	B	70	((	
15	185/60R15	88\XL H	5.5 J	7.6 / 9.6	E	B	70	((	
15	185/65R15	92XL H	5.5 J	7.6 / 9.6	E	B	70	((	
15	195/50R15*	86 W	6J	7.8 / 9.8	E	B	71	((	
15	195/55R15	85 V	6 J	7.6 / 9.6	E	B	71	((	
15	195/60R15	88 V	6 J	7.6 / 9.6	E	B	71	((	
15	195/65R15	95\XL H	6 J	7.6 / 9.6	E	B	71	((	
16	175/50R16*	77 V	5.5J	-	E	B	70	((	
16	195/55R16	91\XL V	6 J	7.6 / 9.6	C	B	71	((	
16	205/45ZR16	87\XL W	7J	7.6 / 9.6	C	B	71	((	
16	205/55R16	94\XL V	6.5 J	7.6 / 9.6	C	B	71	((	
16	205/60R16	96\XL V	6 J	7.8 / 9.8	C	B	71	((	
16	215/55R16	97\XL V	7 J	7.8 / 9.8	C	B	71	((	
16	215/60R16	99\XL V	6.5 J	7.8 / 9.8	C	B	71	((	
16	215/65R16*	98 H	6.5J	7.8 / 9.8	C	B	71	((	

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D		EU LABELING			
				(mm/32nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
16	225/55R16*	99 V	7J	7.6 / 9.6	C	B	71	((	
17	205/50ZR17	93\XL W	6.5 J	7.6 / 9.6	C	B	71	((	
17	205/55R17	95\XL V	6.5 J	7.6 / 9.6	C	B	71	((	
17	215/45ZR17	91\XL W	7J	7.8 / 9.8	C	B	71	((	
17	215/50ZR17	95\XL W	7 J	7.8 / 9.8	C	B	71	((	
17	215/55R17	98\XL V	7 J	7.8 / 9.8	C	B	71	((	
17	215/60R17*	100\XL V	6.5J	7.8 / 9.8	C	B	71	((	
17	225/45ZR17	94\XL W	7.5J	7.8 / 9.8	C	B	71	((	
17	225/50ZR17	98\XL W	7 J	7.8 / 9.8	C	B	71	((	
17	225/55R17	101\XL V	7 J	7.8 / 9.8	C	B	71	((	
17	225/65R17	102 H	6.5 J	8.8 / 11.1	C	B	71	((	
17	235/45ZR17*	97\XL W	8J	7.8 / 9.8	C	B	71	((	
17	235/55ZR17	103\XL W	7.5J	7.8 / 9.8	C	B	71	((	
18	225/40ZR18	92\XL W	8 J	7.8 / 9.8	C	B	71	((	
18	235/60R18	107\XL V	7 J	8.8 / 11.1	C	B	71	((	
19	235/55R19	105\XL V	7.5 J	8.8 / 11.1	C	B	71	((	
21	295/35ZR21	107\XL W	10.5 J	7.8 / 9.8	C	B	74	((	

*NEW




WINTER MASTER D1

~ ENGINEERED IN GERMANY ~


SNOW



ROLLING RESISTANCE




WET GRIP PERFORMANCE




QUIETNESS



COMFORT




TREAD LIFE

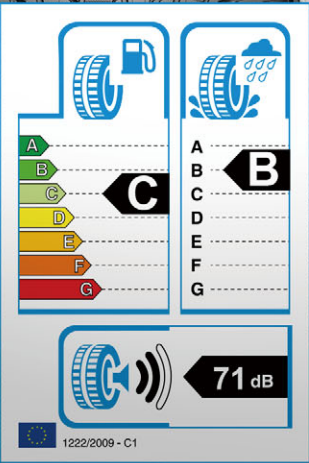


SINGLE-ORIENTED SNOW PATTERN

Single-oriented snow pattern, provides excellent handling performance and snow drainage performance on ice and snow surface to ensure braking performance.

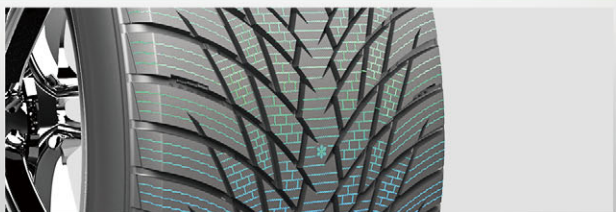

3D GROOVE DESIGN

The 3D groove design can effectively prevent the tires from sliding on the ice and snow surface, improve braking and handling performance and ensure the safety of high-speed driving.

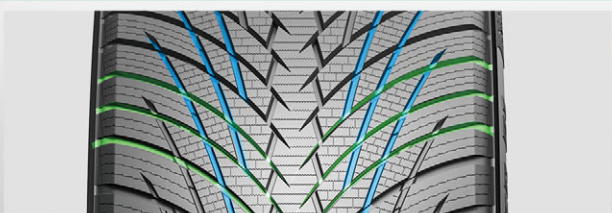

V-SHAPED AND HERRINGBONE PATTERN DESIGN

Combination design of V-shaped and herringbone pattern blocks can reduce noise and improve snow drainage performance on ice and snow surface. At the same time it will make sure the block strength provides excellent handling performance.



SPECIAL CACOMPOUNDING FORMULA

The special anti- "low temperature" compounding formula provides strong grip on ice and snow surface, improves braking performance and ensures safe traveling.

WINTER MASTER D1

SIZES & SPECIFICATION

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D		EU LABELING			
				(mm/32nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
14	155/65R14	75 T	4.5J	7.7 / 9.7	-	-	-	-	
14	165/70R14	81 T	5J	7.7 / 9.7	-	-	-	-	
14	175/65R14	82 T	5J	7.7 / 9.7	-	-	-	-	
14	175/70R14	88/XL T	5.5J	7.7 / 9.7	-	-	-	-	
14	185/60R14	82 T	5.5J	8.1 / 10.2	-	-	-	-	
14	185/65R14	86 T	5.5J	8.1 / 10.2	-	-	-	-	
15	175/65R15	84 T	5J	7.7 / 9.7	-	-	-	-	
15	185/55R15	82 T	6J	8.1 / 10.2	-	-	-	-	
15	185/60R15	88/XL T	5.5J	8.1 / 10.2	-	-	-	-	
15	185/65R15	88 H	5.5J	8.1 / 10.2	-	-	-	-	
15	195/55R15	85 H	6J	8.1 / 10.2	-	-	-	-	
15	195/60R15	88 H	6J	8.1 / 10.2	-	-	-	-	
15	195/65R15	91 T	6J	8.1 / 10.2	-	-	-	-	
15	205/65R15	94 T	6J	8.1 / 10.2	-	-	-	-	
16	195/55R16	87 H	6 J	8.1 / 10.2	-	-	-	-	
16	205/55R16	91 H	6.5 J	8.1 / 10.2	-	-	-	-	
16	205/60R16	96/XL H	6J	8.1 / 10.2	-	-	-	-	
16	215/55R16	97/XL H	7 J	8.1 / 10.2	-	-	-	-	
16	215/60R16	99/XL H	6.5J	8.1 / 10.2	-	-	-	-	
16	215/65R16	98 H	6.5J	8.1 / 10.2	-	-	-	-	
16	225/55R16	99/XL V	7J	8.1 / 10.2	-	-	-	-	
16	225/60R16	102/XL H	6.5J	8.1 / 10.2	-	-	-	-	
17	205/50R17	93/XL V	6.5 J	8.1 / 10.2	-	-	-	-	
17	215/45R17	91/XL V	7J	8.1 / 10.2	-	-	-	-	
17	215/50R17	95/XL V	7 J	8.1 / 10.2	-	-	-	-	
17	215/55R17	98/XL V	7 J	8.1 / 10.2	-	-	-	-	
17	215/60R17	96 H	6.5J	8.1 / 10.2	-	-	-	-	

	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D		EU LABELING			
				(mm/32nds)	ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL	
17	225/45R17	91 H	7.5J	8.1 / 10.2	-	-	-	-	
17	225/45R17	94/XL V	7.5J	8.1 / 10.2	-	-	-	-	
17	225/50R17	98/XL V	7 J	8.1 / 10.2	-	-	-	-	
17	225/55R17	101/XL V	7 J	8.1 / 10.2	-	-	-	-	
17	225/60R17	99 H	6.5J	8.1 / 10.2	-	-	-	-	
17	225/60R17	103/XL V	6.5J	8.1 / 10.2	-	-	-	-	
17	225/65R17	102 H	6.5 J	8.1 / 10.2	-	-	-	-	
17	225/65R17	106/XL H	6.5 J	8.1 / 10.2	-	-	-	-	
17	235/45R17	97/XL V	8J	8.1 / 10.2	-	-	-	-	
17	235/55R17	103/XL V	7.5J	8.1 / 10.2	-	-	-	-	
17	235/60R17	102 V	7J	8.1 / 10.2	-	-	-	-	
17	235/60R17	106/XL H	7J	8.1 / 10.2	-	-	-	-	
17	235/65R17	108/XL V	7J	8.1 / 10.2	-	-	-	-	
18	225/40R18	92/XL V	8J	8.1 / 10.2	-	-	-	-	
18	225/45R18	95/XL V	7.5J	8.1 / 10.2	-	-	-	-	
18	235/40R18	95/XL V	8.5J	8.1 / 10.2	-	-	-	-	
18	235/45R18	98/XL V	8 J	8.1 / 10.2	-	-	-	-	
18	235/60R18	107/XL V	7J	8.1 / 10.2	-	-	-	-	
18	245/40R18	97/XL V	8.5J	8.1 / 10.2	-	-	-	-	
18	245/45R18	100/XL V	8 J	8.1 / 10.2	-	-	-	-	
18	255/55R18	109/XL V	8J	8.1 / 10.2	-	-	-	-	
19	235/55R19	105/XL V	7.5 J	8.1 / 10.2	-	-	-	-	
19	245/40ZR19	98/XL W	8.5J	8.1 / 10.2	-	-	-	-	
19	255/50R19	107/XL V	8 J	8.1 / 10.2	-	-	-	-	
20	275/40ZR20	106/XL W	9.5J	8.1 / 10.2	-	-	-	-	
20	275/45ZR20	110/XL W	9 J	8.1 / 10.2	-	-	-	-	
21	295/35R21	107/XL V	10.5J	7.9 / 10.0	-	-	-	-	


ROUGH MASTER-RT

~ ENGINEERED IN GERMANY ~


RT



ROLLING RESISTANCE



WET GRIP PERFORMANCE




QUIETNESS



COMFORT



TREAD LIFE

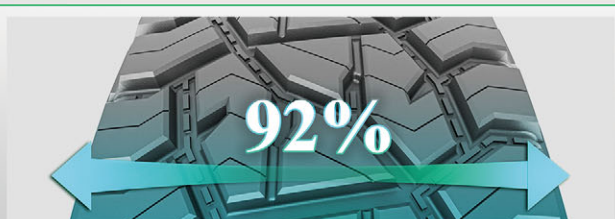


WIDER RUNNING SURFACE

The width of the running surface is widened to 92% of the section width (VS only 80% of it for ordinary products), which effectively improves the driving stability of the tire and ensures excellent handling performance.




SPECIAL DESIGN OF TIRE SHOULDER

The special design of tire shoulder and the steel sheet not only look beautiful and powerful but also prevent cutting, scratching and impact damage from sharp objects. And it can adapt to extreme off-road conditions.

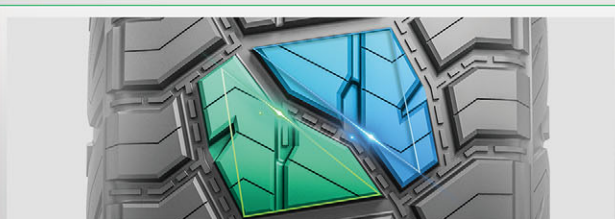

AGGRESSIVE COMBINATION DESIGN

The aggressive combination design of "two triangles" in the middle part improves the ability of discharging snow and mud to avoid skidding in the snow and mud.

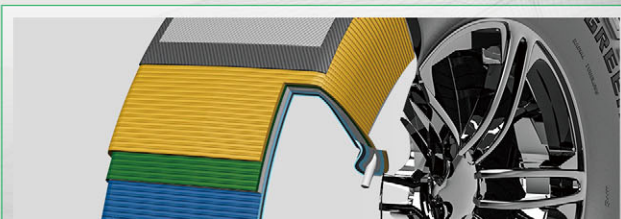

TRIPLE PLY POLYESTER DESIGN

The whole series adopts a triple ply polyester design with high sidewall turn up to improve the strength and rigidity of the sidewall, and improve the safety performance and handling performance of the tire.

ROUGH MASTER-RT

SIZES & SPECIFICATION

	SIZE	PR/LR	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D (mm/32nds)
15	31*10.50R15LT*	-	109 Q	8.5J	11.5 / 14.5
16	LT285/75R16*	-	126/123 Q	8J	11.5 / 14.5
17	33*12.50R17LT	10 E	120 Q	10J	12.5 / 15.7
17	35*12.50R17LT*	-	121 Q	10J	12.5 / 15.7
17	LT265/65R17	10 / E	120/117 Q	8J	11.5 / 14.5
17	LT265/70R17	10 / E	121/118 S	8J	11.5 / 14.5
17	LT285/70R17	10 / E	121/118 S	8.5J	11.5 / 14.5
18	33*12.50R18LT	12 F	122 Q	10J	12.5 / 15.7
18	35*12.50R18LT*	-	128 Q	10J	12.5 / 15.7
18	LT265/60R18*	-	119/116 Q	8J	11.5 / 14.5
18	LT265/65R18*	-	122/119 S	8J	11.5 / 14.5
18	LT285/60R18*	-	122/119 Q	8.5J	11.5 / 14.5
18	LT285/65R18*	-	125/122 Q	8.5J	11.5 / 14.5
20	33*12.50R20LT	12 F	119 Q	10J	12.5 / 15.7
20	35*12.50R20LT	12 F	125 Q	10J	12.5 / 15.7
20	LT265/50R20	10 / E	115/112 Q	8.5J	11.5 / 14.5
20	LT275/55R20	10 / E	120/117 Q	8.5J	11.5 / 14.5

	SIZE	PR/LR	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D (mm/32nds)
20	LT275/60R20	10 / E	123/120 Q	8J	11.5 / 14.5
20	LT285/50R20	10 / E	119/116 Q	9J	11.5 / 14.5
20	LT285/55R20	10 / E	122/119 Q	9J	11.5 / 14.5
20	LT305/55R20	12 / F	125/122 Q	9.5J	11.5 / 14.5
22	33*12.50R22LT	12 F	114 Q	10J	12.5 / 15.7
22	35*12.50R22LT*	-	121 Q	10J	12.5 / 15.7
22	LT285/45R22	10 / E	116/113 Q	9.5J	11.5 / 14.5
22	LT305/40R22	12 / F	115/112 Q	11J	11.5 / 14.5
22	305/45R22*	-	118 T	10J	10.5 / 13.2
22	LT305/50R22*	-	119/116 Q	9.5J	11.5 / 14.5
22	LT315/45R22	10 / E	116/113 Q	11J	11.5 / 14.5
24	33*12.50R24LT	12 F	110 Q	10J	12.5 / 15.7
24	LT295/40R24*	-	122/119 Q	10J	11.5 / 14.5
24	LT295/45R24*	-	120/117 Q	10J	11.5 / 14.5
24	LT305/45R24*	-	117/114 Q	10J	11.5 / 14.5
26	LT305/35R26	10 / E	108/104 Q	11J	11.5 / 14.5

*NEW

POR (Professional Off Road)

This tyre is a special use tyre primarily used for service in severe off-road conditions and is except from tyre performance label grading.



PRODAG-SII

~ ENGINEERED IN GERMANY ~

RACING



- ◆ Single directional pattern provides excellent straight line handling and wetland performance;
- ◆ The shoulders are reinforced with a large block pattern to ensure fast turn grip while providing excellent handling
- ◆ All-silicon drift formula provides excellent dry&wetland grip



	SIZE	LOAD INDEX / SPEED CODE	STANDARD RIM	O.T.D (mm/32nds)	EU LABELING			
					ROLLING RESISTANCE	WET	NOISE	NOISE LEVEL
18	235/45ZR18	98/XL W	8J	7.0 / 8.8	C	C	70	((
18	265/40ZR18	101/XL W	9.5J	7.0 / 8.8	C	C	71	((
18	295/35ZR18	103/XL W	10.5J	7.0 / 8.8	C	C	73	((

UTQG:240 AA