



PCR



TC515



TC525



TC565



TC575



TC585



TC595



TC588



TC ICEHOLDER



TC555



MT-X



TC566



TC577


SMOKED SHEET RUBBER



TEARING
RESISTANCE
RESIN



HIGH ABRASION
FURNACE
CARBON BLACK

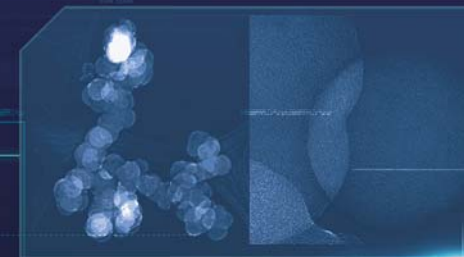

INTERTRAC a higher level brand with leading technology from Keter Company.

Excellent material, including smoked sheet rubber, high abrasion furnace carbon black and Tearing resistance resin are applied in **INTERTRAC** tyres, they are the core and soul of the tyres, which dramatically improves the tyres in a safe, durable and environmental-friendly way. Now, days green and safe tyres are highly needed by the world.





FOUR LONGITUDINAL GROOVES

- Effective drainage and wet grip performance.
- Better wet safety.



WIDE PATTERN GROOVE DESIGN

- Avoid air flow vibration frequency effectively, reduce the abnormal wear and extend the life of the tyre.



RUN-FLAT DESIGN

- Better handling performance.
- Ensure the safety when the air's leaking.



TC555 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
225/50ZRF17	98W	7J	658 / 25.9	233 / 9.2	7.9 / 10	320AA
225/55ZRF17	101/XLW	7J	680 / 26.8	233 / 9.2	7.9 / 10	320AA
225/45ZRF18	95W	7½J	659 / 25.9	225 / 8.9	7.9 / 10	320AA
245/45ZRF18	100W	8J	677 / 26.7	243 / 9.6	7.9 / 10	320AA
245/50ZRF18	100W	7½J	703 / 27.7	253 / 10.0	7.9 / 10	320AA
255/40ZRF18	99W	9J	661 / 26.0	260 / 10.3	7.9 / 10	320AA
255/55ZRF18	109V	8J	737 / 29.0	265 / 10.5	7.9 / 10	320AA
255/50ZRF19	107/XLW	8J	739 / 29.1	265 / 10.5	7.9 / 10	320AA
225/55ZRF19	-	-	-	-	-	-



BLOCK TREAD DESIGN

- The block tread design provides outstanding off-road traction and gripping power.

3 MAIN ZIGZAG GROOVES

- 3 main zigzag grooves provide excellent traction performance.



BALANCED VOID RATIO

- The balanced void ratio efficiently removes mud and dirt to provide continuous off-road traction.



MT-X PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)
LT235/75R15	116/113Q	6.5J	739 / 29.1	235 / 9.3
LT245/75R16	120/116Q	7.0J	780 / 30.7	248 / 9.8
LT265/75R16	123/120Q	7.5J	810 / 31.9	267 / 10.6
LT285/75R16	126/123Q	8.0J	840 / 33.1	286 / 11.3
LT265/70R17	121/118Q	8.0J	810 / 31.9	272 / 10.8
LT285/70R17	121/118Q	8.5J	838 / 33.0	292 / 11.5
30*9.50R15LT	104Q	7.5J	756 / 29.8	240 / 9.5
31*10.50R15LT	109Q	8.5J	781 / 30.7	268 / 10.6
35*12.5R17LT	121Q	10.0J	883 / 34.8	318 / 12.6
33*12.5R18LT	118Q	10.0J	832 / 32.8	318 / 12.6
35*12.5R18LT	123Q	10.0J	883 / 34.8	318 / 12.6
33*12.50R20LT	114Q	10.0J	883 / 34.8	318 / 12.6
35*12.50R20LT	121Q	10.0J	838 / 33.0	318 / 12.6
33*12.50R22LT	-	-	-	-

TC515

PCR



'BEVEL EDGE' DESIGN FOR GROOVES

- Avoiding irregular wear.
- Longer tire life.



'EU TIRE LABELING REGULATION' APPROVED


- Low energy consumption.
- Good wetland performance.
- Low noise.

TC515 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
155/65R13	73T	4 1/2J	532 / 20.9	157 / 6.2	7.7 / 9.8	-
155/70R13	73T	4 1/2J	548 / 21.6	157 / 6.2	7.5 / 9.5	380AA
155/80R13	79T	4 1/2J	578 / 22.8	157 / 6.2	7.5 / 9.5	380AA
165/65R13	77H	5J	544 / 21.4	170 / 6.7	7.7 / 9.8	-
165/70R13	79T	5J	562 / 22.1	170 / 6.7	7.5 / 9.5	380AA
165/70R13	79H	5J	562 / 22.1	170 / 6.7	7.5 / 9.5	380AA
165/80R13	83H	4 1/2J	594 / 23.4	170 / 6.7	7.5 / 9.5	380AA
175/60R13	77H	5J	540 / 21.3	177 / 7.0	7.5 / 9.5	380AA
175/70R13	82T	5J	576 / 22.7	177 / 7.0	7.5 / 9.5	380AA
175/70R13	82H	5J	576 / 22.7	177 / 7.0	7.5 / 9.5	380AA
185/70R13	86H	5 1/2J	590 / 23.2	189 / 7.5	7.5 / 9.5	380AA
155/65R14	75H	4 1/2J	558 / 22.0	157 / 6.2	7.7 / 9.8	380AA
165/60R14	75H	5J	554 / 21.8	170 / 6.7	7.7 / 9.8	-
165/65R14	79H	5J	570 / 22.4	170 / 6.7	7.5 / 9.5	380AA
165/70R14	81T	5J	588 / 23.1	170 / 6.7	7.7 / 9.8	-
175/65R14	82T	5J	584 / 23.0	177 / 7.0	7.5 / 9.5	380AA
175/65R14	82H	5J	584 / 23.0	177 / 7.0	7.5 / 9.5	380AA
175/65R14	86T	5J	584 / 23.0	177 / 7.0	7.5 / 9.5	380AA
175/65R14	86H	5J	584 / 23.0	177 / 7.0	7.5 / 9.5	380AA
175/70R14	84H	5J	602 / 23.7	177 / 7.0	7.5 / 9.5	380AA
175/70R14	88H	5J	602 / 23.7	177 / 7.0	7.7 / 9.8	-
185/60R14	82H	5 1/2J	578 / 22.8	189 / 7.5	7.5 / 9.5	380AA
185/65R14	86T	5 1/2J	596 / 23.5	189 / 7.5	7.5 / 9.5	380AA
185/65R14	86H	5 1/2J	596 / 23.5	189 / 7.5	7.5 / 9.5	380AA
185/70R14	88T	5 1/2J	616 / 24.3	189 / 7.5	7.5 / 9.5	380AA
185/70R14	88H	5 1/2J	616 / 24.3	189 / 7.5	7.5 / 9.5	380AA
195/60R14	86H	6J	590 / 23.2	201 / 8.0	7.7 / 9.8	380AA
195/65R14	89H	6J	610 / 24.0	201 / 8.0	7.7 / 9.8	380AA
195/70R14	91T	6J	630 / 24.8	201 / 8.0	7.7 / 9.8	380AA
195/70R14	91H	6J	630 / 24.8	201 / 8.0	7.7 / 9.8	380AA
195/70R14	95H	6J	630 / 24.8	201 / 8.0	7.7 / 9.8	380AA
195/75R14	92H	5 1/2J	648 / 25.5	196 / 7.8	7.7 / 9.8	380AA
205/60R14	88H	6J	602 / 23.7	209 / 8.3	7.7 / 9.8	380AA
205/70R14	98T	6J	644 / 25.4	209 / 8.3	7.9 / 10.0	380AA
165/65R15	81H	5J	595 / 23.4	170 / 6.7	7.7 / 9.8	380AA
175/55R15	77H	5 1/2J	573 / 22.6	182 / 7.2	7.7 / 9.8	380AA
175/60R15	81H	5J	591 / 23.3	177 / 7.0	7.5 / 9.5	380AA
175/65R15	84H	5J	609 / 24.0	177 / 7.0	7.7 / 9.8	380AA
185/55R15	82V	6J	585 / 23.0	189 / 7.5	7.5 / 9.5	380AA
185/60R15	84H	5 1/2J	603 / 23.7	189 / 7.5	7.5 / 9.5	380AA
185/60R15	88H	5 1/2J	603 / 23.7	189 / 7.5	7.5 / 9.5	380AA

TC525

PCR



GRIP FORMULA

- Nano carbon black inside.
- Excellent wet grip performance.

'HULK' DESIGN FOR SHOULDER

- Avoiding irregular wear.
- Longer tire life.



'LEFT ≠ RIGHT' PATTERN DESIGN

- Balance draining with traction.
- Good handling. More security.



'SALIX LEAF' BLOCK DESIGN

- Avoiding irregular wear.



TC525 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
235/55ZR17	103W	7 1/2J	690 / 27.2	245 / 9.7	7.7 / 9.8	320AA
235/60R17	102V	7J	714 / 28.1	240 / 9.5	7.7 / 9.8	320AA
245/40ZR17	95/XLW	8 1/2J	628 / 24.7	248 / 9.8	7.7 / 9.8	320AA
245/45ZR17	99W	8J	652 / 25.7	243 / 9.6	7.7 / 9.8	320AA
215/35ZR18	84W	7 1/2J	607 / 23.9	218 / 8.6	7.7 / 9.8	320AA
225/40ZR18	92W	8J	637 / 25.1	230 / 9.1	7.7 / 9.8	320AA
225/45ZR18	95W	7 1/2J	659 / 25.9	225 / 8.9	7.7 / 9.8	320AA
225/55ZR18	102/XLW	7J	705 / 27.8	233 / 9.2	7.7 / 9.8	320AA
225/60R18	104V	6 1/2J	727 / 28.6	228 / 9.0	7.7 / 9.8	320AA
235/40ZR18	95W	8 1/2J	645 / 25.4	241 / 9.5	7.7 / 9.8	320AA
235/45ZR18	98W	8 1/2J	669 / 26.3	236 / 9.3	7.7 / 9.8	320AA
235/50ZR18	101W	7 1/2J	693 / 27.3	245 / 9.7	7.7 / 9.8	320AA
235/55R18	100T	7 1/2J	715 / 28.1	245 / 9.7	7.7 / 9.8	320AA
235/55ZR18	104W	7 1/2J	715 / 28.1	245 / 9.7	7.7 / 9.8	320AA
245/40ZR18	97W	8 1/2J	653 / 25.7	248 / 9.8	7.7 / 9.8	320AA
245/45ZR18	100W	8J	677 / 26.7	243 / 9.6	7.7 / 9.8	320AA
245/50ZR18	100W	7 1/2J	703 / 27.7	253 / 10.0	7.7 / 9.8	320AA
255/35ZR18	94/XLY	9J	635 / 25.0	260 / 10.3	7.7 / 9.8	320AA
255/40ZR18	99/XLW	9J	661 / 26.0	260 / 10.3	7.7 / 9.8	320AA
255/45ZR18	103W	8 1/2J	687 / 27.0	255 / 10.1	7.7 / 9.8	320AA
265/35R18	97Y	9 1/2J	643 / 25.3	230 / 9.1	7.7 / 9.8	320AA
225/35ZR19	88W	8J	641 / 25.2	230 / 9.1	7.7 / 9.8	320AA
235/35ZR19	91W	8 1/2J	647 / 25.5	241 / 9.5	7.7 / 9.8	320AA
235/45ZR19	99/XLW	8J	695 / 27.4	236 / 9.3	7.7 / 9.8	320AA
245/35ZR19	93W	8 1/2J	655 / 25.8	248 / 9.8	7.7 / 9.8	320AA
245/40ZR19	98/XLW	8 1/2J	679 / 26.7	248 / 9.8	7.7 / 9.8	320AA
245/45ZR19	102W	8J	703 / 27.7	243 / 9.6	7.7 / 9.8	320AA
255/35ZR19	96/XLW	9J	661 / 26.0	260 / 10.3	7.7 / 9.8	320AA
255/40ZR19	100/XLW	9J	687 / 27.0	260 / 10.3	7.7 / 9.8	320AA
225/35ZR20	90W	8J	686 / 26.2	230 / 9.1	7.7 / 9.8	320AA
235/35ZR20	92W	8 1/2J	672 / 26.5	241 / 9.5	7.7 / 9.8	320AA
245/35ZR20	95Y	8 1/2J	680 / 26.8	248 / 9.8	7.7 / 9.8	320AA
255/35ZR20	97/XLW	9J	686 / 27.0	260 / 10.3	7.7 / 9.8	320AA
265/45ZR20	108W	9J	746 / 29.4	266 / 10.5	7.7 / 9.8	320AA
265/50R20	111V	8 1/2J	774 / 30.5	277 / 11.0	7.7 / 9.8	320AA
275/40ZR20	106W	9 1/2J	728 / 28.7	278 / 11.0	7.7 / 9.8	320AA

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
235/60R15	98V	7J	663 / 26.1	240 / 9.5	7.7 / 9.8	320AA
245/60R15	101V	7J	675 / 26.6	248 / 9.8	7.7 / 9.8	320AA
195/45R16	84V	6 1/2J	582 / 22.9	195 / 7.7	7.7 / 9.8	320AA
205/45ZR16	87W	7J	590 / 23.2	206 / 8.2	7.7 / 9.8	320AA
215/40ZR16	86W	7 1/2J	578 / 22.8	218 / 8.6	7.7 / 9.8	320AA
225/55ZR16	99W	7J	654 / 25.7	228 / 9	7.7 / 9.8	320AA
225/65R16	100V	6 1/2J	698 / 27.5	228 / 9	7.7 / 9.8	320AA
205/40ZR17	84W	7 1/2J	596 / 23.5	212 / 8.4	7.7 / 9.8	320AA
205/45ZR17	88W	7J	616 / 24.3	206 / 8.2	7.7 / 9.8	320AA
205/50ZR17	93W	6 1/2J	638 / 25.1	214 / 8.5	7.7 / 9.8	320AA
205/55ZR17	95/XLW	6 1/2J	658 / 25.9	214 / 8.5	7.7 / 9.8	320AA
215/40ZR17	87W	7 1/2J	604 / 23.8	213 / 8.4	7.7 / 9.8	320AA
215/45ZR17	91W	7J	626 / 24.6	213 / 8.4	7.7 / 9.8	320AA
215/50ZR17	95W	7J	648 / 25.5	226 / 8.9	7.7 / 9.8	320AA
215/55ZR17	98W	7J	668 / 26.3	226 / 8.9	7.7 / 9.8	320AA
225/45ZR17	94W	7 1/2J	634 / 25.0	225 / 8.9	7.7 / 9.8	320AA
225/50ZR17	98W	7J	658 / 25.9	233 / 9.2	7.7 / 9.8	320AA
225/55ZR17	101W	7J	680 / 26.8	233 / 9.2	7.7 / 9.8	320AA
225/60R17	99V	6 1/2J	702 / 27.6	228 / 9.0	7.7 / 9.8	320AA
235/45ZR17	97W	8J	644 / 25.4	236 / 9.3	7.7 / 9.8	320AA
235/50ZR17	100/XLW	7 1/2J	668 / 26.3	245 / 9.7	7.7 / 9.8	320AA

TC565

PCR



BLOCK TO BLOCK DESIGN

- Good grip performance.
- Better handling & controllability.



'DE-NOISE' SHOULDER DESIGN

- Lower noise during running.
- Driving comfortably.



TC565 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
215/75R15	100T	6J	703 / 27.7	216 / 8.6	8.7 / 11.0	440AA
225/75R15	102T	6J	719 / 28.3	223 / 8.8	8.7 / 11.0	440AA
235/75R15	105S	6½J	733 / 28.9	235 / 9.3	8.7 / 11.0	440AA
215/70R16	100T	6½J	708 / 27.9	221 / 8.8	8.7 / 11.0	440AA
225/70R16	103T	6½J	722 / 28.4	228 / 9.0	8.5 / 10.8	440AA
235/60R16	100V	7J	688 / 27.1	240 / 9.5	8.2 / 10.4	440AA
235/65R16	103H	7J	712 / 28.0	240 / 9.5	8.2 / 10.4	440AA
235/70R16	106T	7J	736 / 29.0	240 / 9.5	8.7 / 11.0	440AA
245/70R16	107T	7J	750 / 29.5	248 / 9.8	8.7 / 11.0	440AA
255/65R16	109H	7½J	738 / 29.1	260 / 10.3	8.5 / 10.8	440AA
255/70R16	111T	7½J	764 / 30.1	260 / 10.3	8.7 / 11.0	440AA
265/70R16	112T	8J	778 / 30.6	272 / 10.8	8.7 / 11.0	440AA
275/70R16	114H	8J	792 / 31.2	279 / 11.0	8.7 / 11.0	440AA
215/60R17	96H	6½J	690 / 27.2	221 / 8.8	8.2 / 10.4	440AA
225/60R17	99H	6½J	712 / 28.0	221 / 8.8	8.2 / 10.4	440AA
225/65R17	106H	6½J	724 / 28.5	223 / 8.8	8.5 / 10.8	440AA
235/55R17	103V	7½J	690 / 27.2	245 / 9.7	8.5 / 10.8	440AA
235/65R17	108H	7J	738 / 29.1	240 / 9.5	8.5 / 10.8	440AA
245/65R17	111H	7J	760 / 29.5	248 / 9.8	8.5 / 10.8	440AA
255/60R17	106V	7½J	738 / 29.1	260 / 10.3	8.7 / 11.0	440AA
255/65R17	110H	7½J	764 / 30.1	260 / 10.3	8.5 / 10.8	440AA
265/65R17	116H	8J	776 / 30.6	272 / 10.8	8.7 / 11.0	440AA
265/70R17	115T	8J	804 / 31.7	272 / 10.8	8.7 / 11.0	440AA
275/65R17	115H	8J	790 / 31.1	279 / 11.0	8.5 / 10.8	440AA
285/65R17	116H	8½J	802 / 31.6	292 / 11.5	8.5 / 10.8	440AA
215/55R18	99V	7J	693 / 27.3	226 / 8.9	8.2 / 10.4	-
235/55R18	104V	7½J	715 / 28.1	245 / 9.7	8.5 / 10.8	440AA
255/55R18	109V	8J	737 / 29.0	265 / 10.5	8.7 / 11.0	440AA
235/60R18	107H	7J	739 / 29.1	240 / 9.5	8.8 / 11.1	440AA
265/60R18	110H	8J	775 / 30.5	272 / 10.8	8.2 / 10.4	440AA
275/65R18	116H	8J	815 / 32.1	279 / 11.0	8.5 / 10.8	440AA
285/50R20	116V	9J	794 / 31.3	292 / 11.5	8.2 / 10.4	440AA

TC585

PCR



'HEAT-RELEASE' DESIGN

- Longer tire life.



'STRAIGHT FORWARD' DESIGN

- Great straight-line driving stability.
- More safety.



'RAINY RIDER' DESIGN

- Effective drainage and wet grip performance.
- Better wet safety.



TC585 PASSENGER CAR TYRE

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
275/70R16	-	114T	8	792 / 31.2	279 / 11.0	9.6 / 12.1	-
265/70R17	-	115S	8J	804 / 31.7	272 / 10.8	9.6 / 12.1	480AB
265/70R17	-	115T	8J	804 / 31.7	272 / 10.8	9.6 / 12.1	480AB
30×9.50R15LT	6	104Q	7½J	750 / 29.5	240 / 9.5	11.6 / 14.7	-
31×10.50R15LT	6	109R	8½J	775 / 30.5	268 / 10.6	11.6 / 14.7	-
31×10.50R15LT	6	109S	8½J	775 / 30.5	268 / 10.6	11.6 / 14.7	-
LT215/75R15	6	100/97R	6J	703 / 27.7	216 / 8.6	11.6 / 14.7	-
LT225/75R15	8	108/104R	6J	719 / 28.3	223 / 8.8	11.6 / 14.7	-
LT225/75R15	8	108/104Q	6J	719 / 28.3	223 / 8.8	11.6 / 14.7	-
LT235/75R15	10	116/113R	6½J	733 / 28.9	237 / 9.4	11.6 / 14.7	-
LT235/75R15	10	116/113Q	6½J	733 / 28.9	237 / 9.4	11.6 / 14.7	-
LT215/85R16	10	115/112R	6J	778 / 30.6	216 / 8.6	11.6 / 14.7	-
LT215/85R16	-	110/ 107Q	6J	778 / 30.6	216 / 8.6	11.6 / 14.7	-
LT225/75R16	10	115/112Q	6J	744 / 29.3	223 / 8.8	11.6 / 14.7	-
LT225/75R16	10	115/112R	6J	744 / 29.3	223 / 8.8	11.6 / 14.7	-
LT235/85R16	10	120/116Q	6½J	806 / 31.7	235 / 9.3	11.6 / 14.7	-
LT235/85R16	10	120/116R	6½J	806 / 31.7	235 / 9.3	11.6 / 14.7	-
LT245/75R16	10	120/116Q	7J	774 / 30.5	248 / 9.8	11.6 / 14.7	-
LT245/75R16	10	120/116R	7J	774 / 30.5	248 / 9.8	11.6 / 14.7	-
LT265/70R16	10	121/118S	8J	778 / 30.6	267 / 10.6	11.6 / 14.7	-
LT265/70R16	10	121/118R	8J	778 / 30.6	267 / 10.6	11.6 / 14.7	-
LT265/75R16	10	123/120Q	7½J	804 / 31.7	267 / 10.6	11.6 / 14.7	-
LT265/75R16	10	123/120R	7½J	804 / 31.7	267 / 10.6	11.6 / 14.7	-
LT285/75R16	10	126/123R	8J	834 / 32.8	289 / 11.4	11.6 / 14.7	-
LT235/80R17	10	120/117Q	6½J	808 / 31.8	237 / 9.4	11.6 / 14.7	-
LT235/80R17	10	120/117R	6½J	808 / 31.8	237 / 9.4	11.6 / 14.7	-
LT245/70R17	10	119/116R	7J	776 / 30.6	248 / 9.8	11.6 / 14.7	-
LT245/70R17	10	119/116S	7J	776 / 30.6	248 / 9.8	11.6 / 14.7	-
LT245/75R17	10	121/118R	7J	806 / 31.7	248 / 9.8	11.6 / 14.7	-
LT265/70R17	10	121/118R	8J	810 / 31.9	267 / 10.6	11.6 / 14.7	-
LT265/70R17	10	121/118S	8J	810 / 31.9	267 / 10.6	11.6 / 14.7	-
LT285/70R17	10	121/118R	8J	838 / 33.0	289 / 11.4	11.6 / 14.7	-
LT265/70R18	10	124/121S	8J	835 / 32.9	267 / 10.6	11.6 / 14.7	-
LT275/65R18	10	123/120 S	8J	815 / 32.1	279 / 11.0	11.6 / 14.7	-

TC588

PCR



FLYING WING TYPE PATTERN DESIGN

- Strong visual sense of speed, drainage performance and curve control ability

FOUR LONGITUDINAL GROOVES

- Effective drainage and wet grip performance.
- Better wet safety.



CENTRAL WIDE RIB DESIGN

- Central wide rib design ensure. the steering performance.



WIDE PATTERN GROOVE DESIGN

- Avoid air flow vibration frequency effectively, reduce the abnormal wear and extend the life of the tyre.



SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
255/45R17	98V	8J	662 / 26.1	255 / 10.1	7.7 / 9.8	320AA
235/45R18	98XLW	8J	669 / 26.3	236 / 9.3	7.7 / 9.8	320AA
235/65R18	110V	7J	760 / 29.9	250 / 9.9	7.7 / 9.8	320AA
255/40R18	99XLW	9J	661 / 26.0	260 / 10.3	7.7 / 9.8	320AA
235/50R19	103V	7½J	719 / 28.3	255 / 10.1	7.7 / 9.8	320AA
235/55R19	105XLW	7½J	741 / 29.2	245 / 9.7	7.7 / 9.8	320AA
245/35R19	93XLW	8½J	655 / 25.8	248 / 9.8	7.7 / 9.8	320AA
245/45R19	102XLW	8J	703 / 27.7	243 / 9.6	7.7 / 9.8	320AA
245/55R19	103W	7½J	753 / 29.6	253 / 10.0	7.7 / 9.8	320AA
265/30R19	93XLW	9½J	643 / 25.3	271 / 10.7	7.7 / 9.8	320AA

TC588 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)	UTQG
275/40ZR19	-	-	-	-	7.7 / 9.8	320AA
225/30R20	-	-	-	-	7.7 / 9.8	320AA
235/30ZR20	88XLW	8½J	651 / 25.6	241 / 9.5	7.7 / 9.8	320AA
245/35ZR20	95W	8½J	680 / 26.8	248 / 9.8	7.7 / 9.8	320AA
245/45ZR20	103W	8J	728 / 28.7	243 / 9.6	7.7 / 9.8	320AA
245/50ZR20	102W	7½J	754 / 29.7	253 / 10.0	7.7 / 9.8	320AA
255/45ZR20	105XLW	8½J	738 / 29.1	255 / 10.1	7.7 / 9.8	320AA
255/50ZR20	109XLY	8J	764 / 30.1	265 / 10.5	7.7 / 9.8	320AA
265/40ZR20	104XLY	9½J	720 / 28.3	271 / 10.7	7.7 / 9.8	320AA
265/50ZR20	111XLW	8½J	774 / 30.5	277 / 11.0	7.7 / 9.8	320AA
275/35ZR20	102XLW	9½J	700 / 27.6	278 / 11.0	7.7 / 9.8	320AA
275/40ZR20	106XLW	9½J	728 / 28.7	278 / 11.0	7.7 / 9.8	320AA
275/45ZR20	110W	9J	756 / 29.8	273 / 10.8	7.7 / 9.8	320AA
275/55R20	117V	8½J	810 / 31.9	248 / 9.8	7.7 / 9.8	320AA
275/55ZR20	117W	8½J	810 / 31.9	248 / 9.8	7.7 / 9.8	320AA
275/60ZR20	115V	8J	838 / 33.0	279 / 10.0	7.7 / 9.8	320AA
285/50ZR20	116XLW	9J	794 / 31.3	297 / 11.7	7.7 / 9.8	320AA
225/30ZR22	86XLW	8J	695 / 27.4	230 / 9.1	7.7 / 9.8	320AA
235/30ZR22	90W	8½J	701 / 27.6	241 / 9.5	7.7 / 9.8	320AA
245/30ZR22	92W	8½J	707 / 27.8	248 / 9.8	7.7 / 9.8	320AA
255/30ZR22	95W	9J	713 / 28.1	260 / 10.3	7.7 / 9.8	320AA
265/30ZR22	97W	9½J	719 / 28.3	271 / 10.7	7.7 / 9.8	320AA
265/35ZR22	102W	9½J	745 / 29.3	271 / 10.7	7.7 / 9.8	320AA
265/40ZR22	106W	9½J	771 / 30.4	271 / 10.7	7.7 / 9.8	320AA
265/35ZR22	106W	10 J	759 / 29.9	290 / 11.5	7.7 / 9.8	320AA
285/45ZR22	114XLW	9½J	815 / 32.1	285 / 11.3	7.7 / 9.8	320AA
295/25ZR22	97Y	10 J	707 / 27.8	301 / 11.9	7.7 / 9.8	320AA
295/30ZR22	103W	10 J	737 / 29.0	301 / 11.9	7.7 / 9.8	320AA
305/40ZR22	114W	11J	803 / 31.6	313 / 12.4	7.7 / 9.8	320AA
305/45ZR22	118W	10 J	833 / 32.8	303 / 12.0	7.7 / 9.8	320AA
255/30ZR24	97XLW	9J	764 / 30.1	260 / 10.3	7.7 / 9.8	320AA
275/25ZR24	96XLW	10J	748 / 29.4	283 / 11.2	7.7 / 9.8	320AA
275/30ZR24	101W	9½J	776 / 30.6	278 / 11.0	7.7 / 9.8	320AA
295/35ZR24	110V	10½J	816 / 32.1	301 / 11.9	7.7 / 9.8	320AA
295/35ZR24	110W	10½J	816 / 32.1	301 / 11.9	7.7 / 9.8	320AA

TC595

PCR



'RAINY RIDER' DESIGN

- Effective drainage and wet grip performance.
- Better wet safety.

TC595 PASSENGER CAR TYRE

SIZE	PR	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)
185R14C	8	102/100S	5½J	650 / 25.6	188 / 7.5	8.7 / 11.0
195R14C	8	106/104S	5½J	666 / 26.2	198 / 7.8	8.7 / 11.0
205R14C	8	109/107R	6	686 / 27.0	208 / 8.2	8.7 / 11.0
195R15C	8	106/104S	5½J	693 / 27.3	196 / 7.8	8.7 / 11.0
175/65R14C	6	90/88T	5J	584 / 23.0	177 / 7.0	8.7 / 11.0
215/75R14C	8	112/110S	6	678 / 26.7	216 / 8.6	8.7 / 11.0
195/70R15C	8	104/102S	6J	655 / 25.8	201 / 8.0	8.7 / 11.0
205/70R15C	8	106/104S	6J	669 / 26.3	209 / 8.3	8.7 / 11.0
215/70R15C	8	109/107S	6½J	683 / 26.9	221 / 8.8	8.7 / 11.0
225/70R15C	8	112/110S	6½J	697 / 27.4	228 / 9.0	9 / 11.4
175/75R16C	6	98/96Q	5J	558 / 22.0	177 / 7.0	8.7 / 11.0
185/75R16C	8	104/102S	5J	684 / 26.9	184 / 7.3	8.7 / 11.0
195/60R16C	8	99/97T	6J	640 / 25.2	201 / 8.0	8.7 / 11.0
195/65R16C	8	104/102T	6J	660 / 26.0	201 / 8.0	8.7 / 11.0
195/75R16C	8	107/105S	5½J	698 / 27.5	201 / 8.0	8.7 / 11.0
205/65R16C	8	107/105T	6J	672 / 26.5	209 / 8.3	8.7 / 11.0
205/75R16C	8	110/118R	5½J	714 / 28.1	209 / 8.3	8.7 / 11.0
215/60R16C	8	103/101TT	5½J	664 / 26.1	221 / 8.8	8.7 / 11.0
215/65R16C	8	109/107T	6½J	686 / 27.0	221 / 8.8	8.7 / 11.0
215/75R16C	10	116/114R	6	728 / 28.7	216 / 8.6	8.7 / 11.0
225/65R16C	8	112/110T	6½J	698 / 27.5	228 / 9.0	9 / 11.4
225/75R16C	10	121/120R	6	744 / 29.3	223 / 8.8	9 / 11.4
235/65R16C	8	115/113T	7J	712 / 28.0	240 / 9.5	9 / 11.4

'HULK' DESIGN FOR SHOULDER

- Better stability.
- Better load performance.



'DE-NOISE' SHOULDER DESIGN

- Lower noise during running.
- Driving comfortably.



❄️ TC575

PCR



'3D SIPE' DESIGN

- Snow ejecting by sipe.
- Better traction performance.



UNIDIRECTIONAL PATTERN DESIGN

- Excellent self-cleaning ability.
- Better grip performance.



'SPIN-DRY' CAVERN DESIGN

- Good grip performance.
- Avoiding sideslip.



TC575 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)
175/65R14	82T	5J	584 / 23.0	177 / 7.0	8 / 10.1
175/65R14	82H	5J	584 / 23.0	177 / 7.0	8 / 10.1
185/65R14	86T	5½J	596 / 23.5	189 / 7.5	8 / 10.1
185/65R14	86H	5½J	596 / 23.5	189 / 7.5	8 / 10.1
165/70R14	81T	5J	588 / 23.1	170 / 6.7	8 / 10.1
185/65R15	88T	5½J	621 / 24.4	189 / 7.5	8 / 10.1
185/65R15	88H	5½J	621 / 24.4	189 / 7.5	8 / 10.1
195/60R15	88T	6J	615 / 24.2	201 / 8.0	8.2 / 10.4
195/60R15	88H	6J	615 / 24.2	201 / 8.0	8.2 / 10.4
195/65R15	91T	6J	635 / 25.0	201 / 8.0	8.2 / 10.4
195/65R15	91H	6J	635 / 25.0	201 / 8.0	8.2 / 10.4
205/65R15	94T	6J	647 / 25.5	209 / 8.3	8.2 / 10.4
205/65R15	94H	6J	647 / 25.5	209 / 8.3	8.2 / 10.4
215/70R15	98T	-	-	-	-
205/55R16	91H	6½J	632 / 24.9	214 / 8.5	8.2 / 10.4
205/60R16	96T	6J	652 / 25.7	209 / 8.3	8.2 / 10.4
205/60R16	96H	6J	652 / 25.7	209 / 8.3	8.2 / 10.4
215/55R16	97H	7J	642 / 25.3	226 / 8.9	8.2 / 10.4
215/55R16	97T	7J	642 / 25.3	226 / 8.9	8.2 / 10.4
215/60R16	99T	6½J	664 / 26.1	221 / 8.8	8.2 / 10.4
215/60R16	99H	6½J	664 / 26.1	221 / 8.8	8.2 / 10.4
215/70R16	100T	-	-	-	-
215/70R16	100H	-	-	-	-
225/65R17	102T	-	-	-	-
225/65R17	102H	-	-	-	-
235/55R17	99H	7½J	690 / 27.2	245 / 9.7	8.2 / 10.4
235/55R17	103H	7½J	690 / 27.2	245 / 9.7	8.2 / 10.4
235/55R17	103V	7½J	690 / 27.2	245 / 9.7	8.2 / 10.4
225/40R18	92H	8J	637 / 25.1	230 / 9.1	8.2 / 10.4
225/40R18	92V	8J	637 / 25.1	230 / 9.1	8.2 / 10.4

❄️ TC ICEHOLDER

PCR



'RAINY RIDER' DESIGN

- Effective drainage and wet grip performance.
- Better wet safety.



'3D SIPE' DESIGN

- Snow ejecting by sipe.
- Better traction performance.



'HULK' DESIGN FOR SHOULDER

- Better stability.
- Better handling performance.



TC ICEHOLDER PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)
215/75R15	100S	6J	703 / 27.7	216 / 8.6	9.1 / 11.5
235/75R15	105S	6½J	733 / 28.9	235 / 9.3	9.1 / 11.5
215/70R16	100T	6½J	708 / 27.9	221 / 8.8	9.1 / 11.5
235/70R16	106T	7J	736 / 29.0	240 / 9.5	9.1 / 11.5
245/70R16	107T	7J	750 / 29.5	248 / 9.8	9.5 / 12.0
235/60R18	107H	7J	739 / 29.1	240 / 9.5	8.8 / 11.1
285/60R18	120T	8½J	799 / 31.5	292 / 11.5	8.8 / 11.1
255/60R19	113H	7½J	789 / 31.1	260 / 10.3	8.8 / 11.1
265/50R19	110H	8½J	749 / 29.5	277 / 11	8.8 / 11.1
275/55R19	111H	8½J	785 / 30.9	284 / 11.2	8.8 / 11.1
275/50R20	113H	8½J	784 / 30.9	284 / 11.2	8.8 / 11.1

TC566

PCR



WATER REPELLING TIRE TREAD

- Efficient water expulsion.
- safety on wet slippery road.



CENTRAL TREAD PATTERN

- Better tire performance.
- Longer life span.



STRENGTHEN SHOULDER AND SIDEWALL

- Better wear resistance.



TC566 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)
155R12C	88/86P	4.50B	556 / 21.9	160 / 6.3	9 / 11.3
145R13C	88/86R	4.00B	568 / 22.4	152 / 6.0	9 / 11.3

TC577

PCR



NUMEROUS MINOR GROOVES

- Three broad vertical drainage grooves
- Better wet performance



PURPOSE DESIGN FOR ALL WEATHER

- All weather conditions tread pattern
- Outstanding riding performance



ANTI-TEAR FORMULA

- Better wear resistance
- Longer tyre life



TC577 PASSENGER CAR TYRE

SIZE	LOAD INDEX/ SPEED CODE	STANDARD RIM	OVERALL DIA (mm/inch)	SECTION WIDTH (mm/inch)	O.T.D (mm/32nds)
215/70R16C	108/106T	6½J	708 / 27.9	224 / 8.8	9 / 11.3